


## Best for 6+cm Depth Light Box

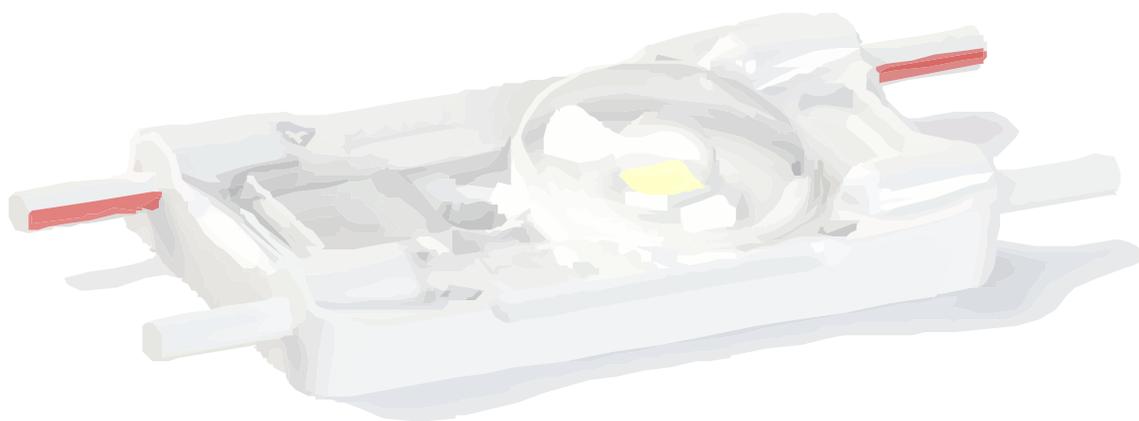

# NOVA50

### 1. Features


- ✧ Constant Current Technology, 50 pcs per series
- ✧ Injection molding process, water proof: IP 67
- ✧ High efficiency chip, high brightness and reliability
- ✧ Special design for protecting component
- ✧ Energy saving, environment friendly
- ✧ Long life span



### 2. Applications

- ✧ Signage lighting
- ✧ Light box lighting

### 3. Dimensions

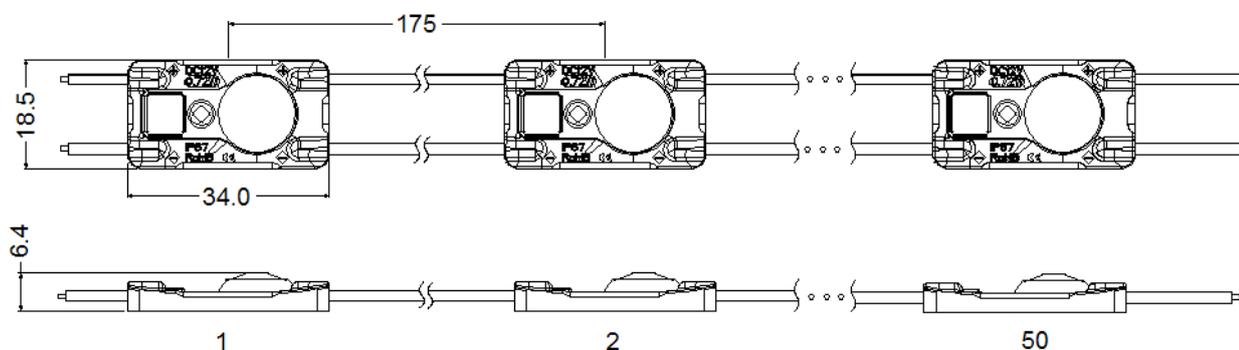

Unit: mm

Note: the pitch based on 155mm wire

### 4. Environmental and Application Conditions

Ambient temperature range (TA on free air)	-25...+55°C
Storage temperature range	-40...+65°C
IP rating	IP67


### 5. Electrical parameters

LED	9V 2835
Supply voltage range (rated)	12 VDC
Supply Current range (per module)	60 mA ±3% @ DC12V
Power range (per module, rated)	0.72W ±10% @ DC12V

## 6. Optical parameters (module base)

Part No.	Color Range			Flux Range		Beam angle
	Min. CCT or wavelength	Typ. CCT or wavelength	Max. CCT or wavelength	Min. Lumen	Typ. Lumen	
NOVA50BC	2800 K	3000 K	3200 K	57	65	165°
NOVA50BN	4000 K	4250 K	4500 K	60	68	165°
NOVA50	6000 K	7000 K	8000 K	60	68	165°

## 7. Light distribution graph

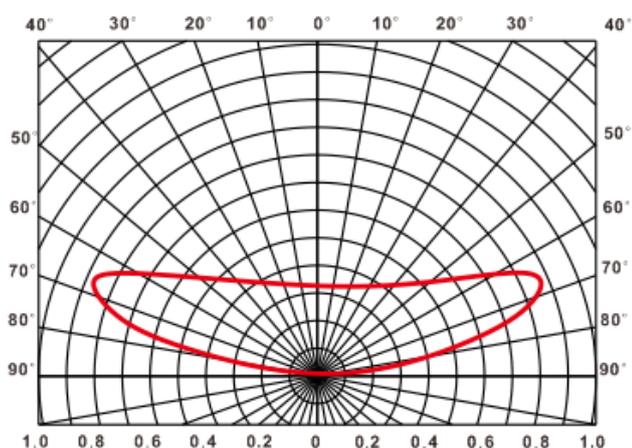

## 8. Attention

- Maximum number of modules of one chain is 50pcs from power supplier to single end.
- The given illuminance parameters ensure illuminance on the surface. Depending on the type of material used for channel letters or lighting boxed, the parameters can change. More brightness is obtained if distances between LED modules are reduced.
- The LED module itself and all its components may not be mechanical stressed.
- Please ensure that the power supply is adequate power to operate the total load. Only qualified personnel should be allowed to perform installations.
- The design of the housing should be according to the IP standards in the application.
- If surge protection structure not within power supplier, a lightning protector should be needed additionally.