



LCON8820S

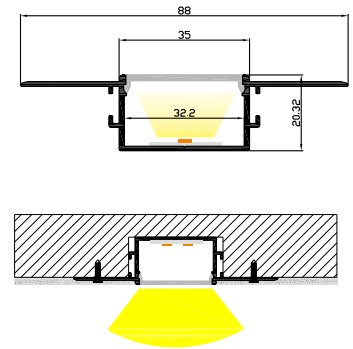

Material:	AL6063-T5
Surface:	Anodized/ Painting
PCcover:	Diffuser /Transparent /Opal
Power:	20W/m
Inputvoltage:	24VDC
Lampbeads:	120LEDs/m (2835)
Lightingsourcewidth:	28mm
Availablengths:	0.5-3m
Application:	Commercial lighting / Indoor lighting

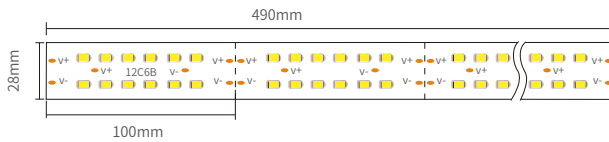


LCON8820S

COVER




Diffuser: DIFUS8820

ENDCAP




Hole: TAP8820W
W/O Hole: TAPS8820W

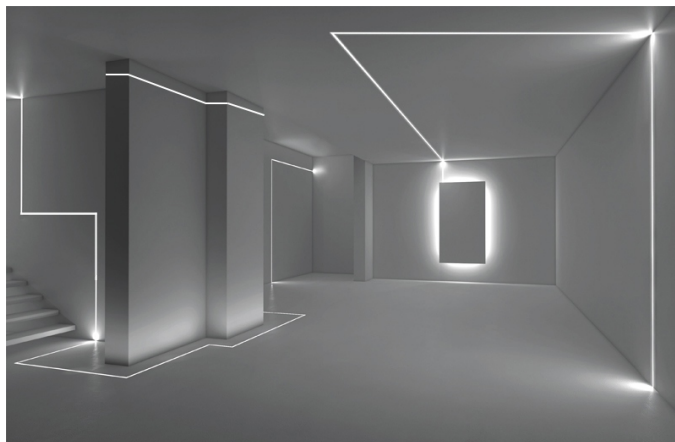


CONNECTOR 180°



CON8820N-180°

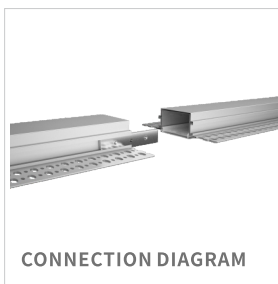


CONNECTION DIAGRAM

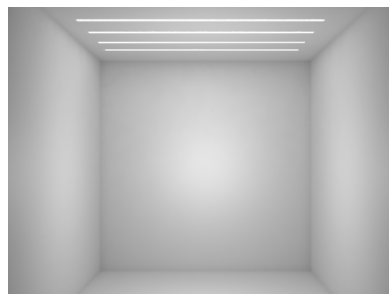


CONNECTOR 90°-1



CON8820I-90°-1

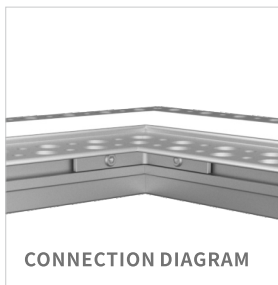

CONNECTION DIAGRAM

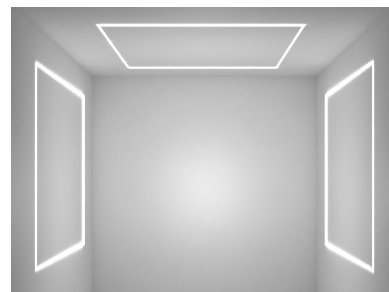


CONNECTOR 90°-2



CON8820E-90°-2



CONNECTION DIAGRAM

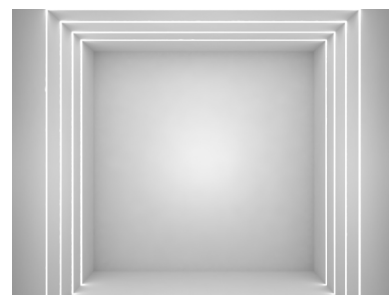

CONNECTION DIAGRAM

